



SIGN	DATE	DESCRIPTION	APPROVER
△	01/20'07	The Soldering temperature from 245° to 250°	Aaron
△	2010.08.12	The design is changed	Chen Bo
<i>THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!</i>			

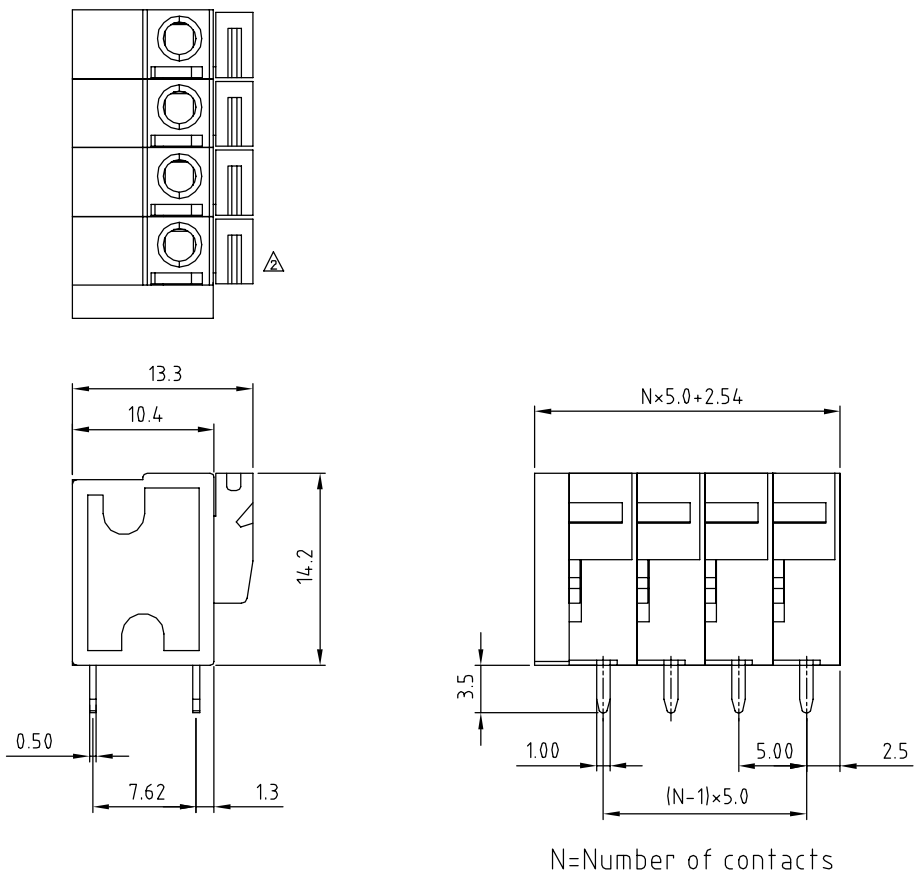


- Material**
- Terminal body (Contact pin): Brass
  - Wire guard: Stainless steel
  - Surface of solder tail: Tin plated
  - Insulator (housing): Thermoplastic (UL94V-0)
- Electrical cULus/VDE**
- Voltage rating: 300VAC/250VAC
  - Current rating: 10A/10A
  - Wire range: 0.75-1.5mm<sup>2</sup>
  - Solid wire(AWG): 14-24
  - Stranded wire(AWG): 14-24
  - Pull force:
  - Screw:
  - Wire strip length: 9-10mm
  - Withstanding Voltage: 1.6KV/2KV
  - Operating temperature: -40°C to +115°C
  - Soldering temperature: 250°C±10°C/5 Sec △
  - Safety Approval:



**HA xx 30 x 0 xxxx G**

HA: 02 2 CONTACTS, 03 3 CONTACTS, ... .., 24 24 CONTACTS  
 xx: 2 Red, 3 Orange, 5 Green(RAL6018/T), 8 Grey(RAL7004/P)  
 30: 30mm length  
 0: 0mm wire length  
 xxxx: 0000: "@ Logo (Standard)", 000A: "ANYTEK" Mark, Any special item by customer request, please contact sales department.  
 G: Pb<40,000ppm

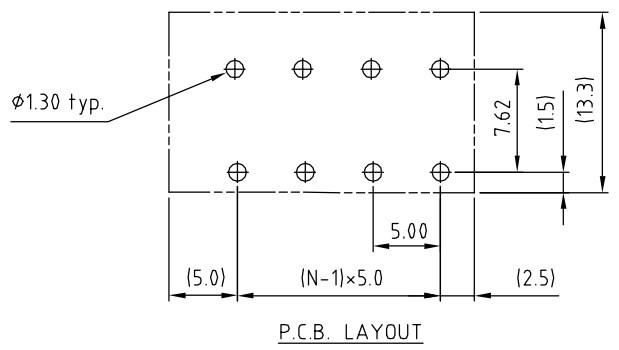

2-6p	±0.20	±0.20
6-12p	±0.25	±0.25
12-24p	±0.40	±0.40

<b>ANYTEK</b>				<b>CUSTOMER COPY</b>			
<small>ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD</small>							
TITLE		HA-5.0mm 90°		DWG NO.		8HA0007	
PART NO.		HAXX30X0XXXXG		CUST NO.			
APPROVED	CHECKED	DESIGNED	DRAWN	UNIT: mm SCALE: NONE		Tolerance	
			Chen Bo 2010.08.12			X. ±0.50 X.X ±0.30 X.XX ±0.10 X° ±1°	
				SHEET: 01/01		REV.: F	