

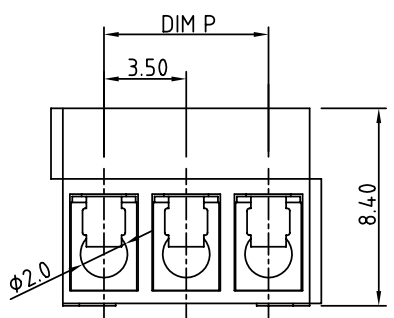


SIGN	DATE	DESCRIPTION	APPROVER
△	03/08'10	Standard spec is changed.	JXO

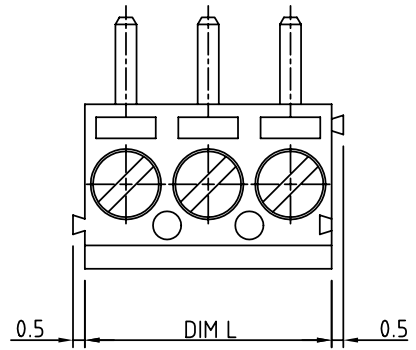

N=Number of contacts

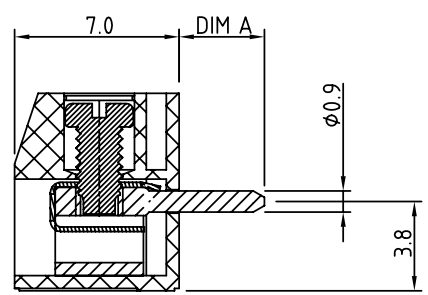

- Material:
- Terminal body
 - (metal housing): Brass(CuZn)
 - Terminal screw: Steel Yellow Chromated Zinc
"-" slot type.
 - Wire guard: Stainless steel
 - Surface of solder tail: Tin plated
 - Insulator(housing): Thermoplastic (UL94V-0)

- △ Electrical:
- Voltage rating: 125V
 - Current rating: 10A
 - Wire range:
 - Solid wire(AWG): 16-26
 - Stranded wire(AWG): 16-26
 - Torque: 1.7Lb-In
 - Screw: M2
 - Wire strip length: 5-6mm
 - Withstanding Voltage: 1.25 KV
 - Operating temperature: -40°C to +115°C
 - Soldering temperature: 250°C±10°C/5 Sec
 - Safety Approval:

TF xx 01 x x 0000G

No. OF POLES ————

02: 2P
... ..
24: 24P

COLOR


0: BLACK
5: GREEN
6: BLUE
8: GREY

Dim A

0 4.4mm
1 3.8mm
2 3.5mm

G: Pb<40000ppm

N = Number of poles
Dim L=Nx3.5
Dim P=(N-1)x3.5

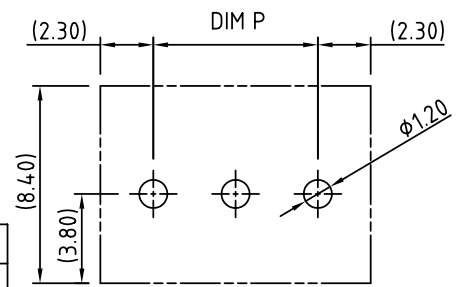

P.C.B. LAYOUT

	Dim L	Dim P
2-6p	±0.20	±0.15
7-12p	±0.25	±0.20
13-18p	±0.30	±0.25
19-24p	±0.40	±0.30

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	TF series				
PART NO.	TFxx01xx0000G		DWG NO.	8TF0002	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance
		Tony 2006.05.30	Tony 2006.05.30		X. ±0.50
					UNIT: mm
				SHEET: 01/01	X.XX ±0.10
				REV.: C	X° ±1°